

## Charger Specifications:

### Temperature Limits:

Operating Range: 0°C to +35°C  
Storage Range: -40°C to +85°C

### Dimensions:

Width: 6.25 inches (159 mm)  
Length: 6.5 inches (165 mm)  
Height: 2.6 inches (66 mm) - without  
batteries or devices inserted.

### Warranty:

Each charger is guaranteed to be free from defects in materials and workmanship for 24 months from date of shipment under normal use.



## Compatible Batteries:

### HMC9000-Li(24) Honeywell® Battery

- Highest quality cells used.
- Longer cycle life.
- Extremely rugged.
- Rigorous testing.




MORE Capacity than the OEM

Trademarks are the sole property of their respective owners.  
The Honeywell® Trademark is used under license from Honeywell® International Inc.

# HCH-9006-CHG

## Six-Bay MC9000 Battery Charger

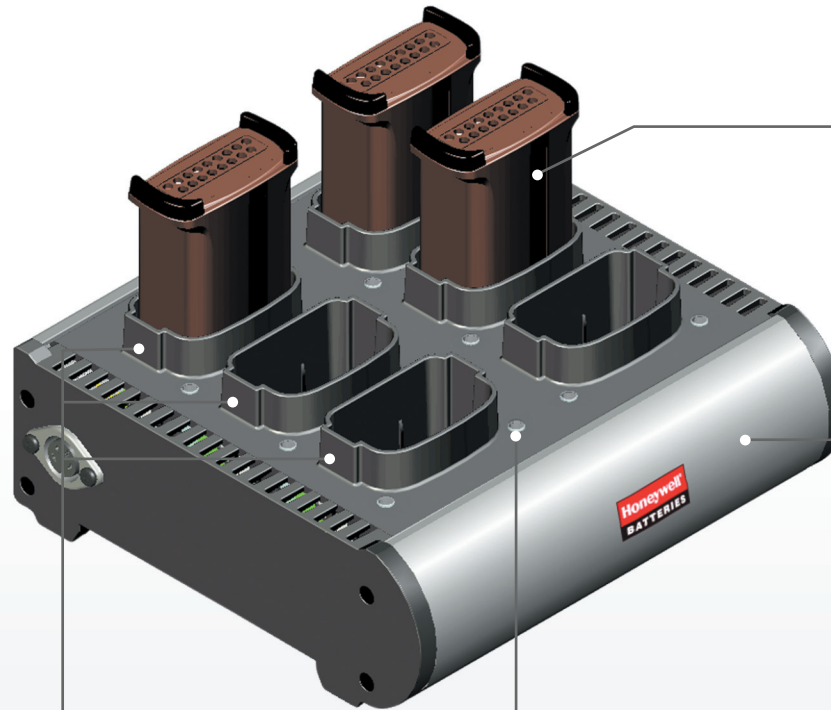

### Dual-chemistry charger

Supports Li-Ion and Li-Polymer chemistries.

### Hassle-free mounting

Utilizes same mounting bracket as Symbol® chargers for easy wall mounting.

Made of highly rugged aerospace grade aluminium housing.

Includes power supplies and cable.

### More efficiency in less space

Charges 50% more batteries in same space as OEM chargers.

### Tri-color charging indications

A charging LED indicates charging status.



### For Pricing or Additional Information Contact:

Global Technology Systems, Inc.  
550 Cochituate Road Framingham, MA 01701  
800.267.2711 ■ In Europe call: 00800.5390.5390  
[www.honeywellbatteries.com](http://www.honeywellbatteries.com)